

# GYGER LEVAGES

Autogrues et transports spéciaux

**Gyger Levages Sàrl**

Neuchâtel – Jura – Berne – Fribourg – Vaud – Genève – Valais

info@gygerlevages.ch

Grues mobiles de 40 à 800 to

Dépannage 24 / 24 h

Transports divers

www.gygerlevages.ch

## Spierings AT6

Capacité maximale : 10 tonnes

Capacité de levage à portée maximale : 1.7 tonne

Hauteur maximale sous crochet : 66.2 mètres

Portée maximale : 60 mètres

Position de flèche relevée : 30°

Poids de la machine : 72 tonnes





**Make: SPIERINGS**      **Type: SK1265-AT6**

**Crane specification (Jib length 60 m)**

Serial number

Year of construction

Crane group : A3 as per FEM 1.001  
 Loadspectrum : Q1 as per FEM 1.001  
 Classification : U4 as per FEM 1.001  
 Stability : as per FEM 1.001

Max. load

**10,0 tonne**

Max. radius  
with max. load

**13,2 m**

Max. capacity

**132 tm**

Max. jib length

**60 m**

**Speeds** Jib horizontal / jib 30° luffed

	m/min	kg		0 - 70 m/min
	15	10000		
	30	5000		0-0,7 r/min
	45	2500		
75	0			

All motions with hydraulic proportional controls  
 Luffing the jib 30° can be controlled from crane cab or via remote control  
 The crane should be folded in at a wind force > 8 on the Beaufort scale (wind speed 20 m/min)


Crane equipped with full counterweight: 13600 kg  
 360° continuous slewing : with outriggers out and down  
 Operating temperature : range from -15° to 40° C.

Rated lifting capacity is net capacity  
 Max. line pull force : 2500 kg  
 2 parts of line: 5000 kg - 1700 kg  
 4 parts of line : 10000 kg - 5000 kg  
 Sail area of the load : max. 1,0 m<sup>2</sup> / tonne  
 Max. outrigger loading: 520 kN

**Outrigger position : 7,95 x 7,66 m**  
 Operation allowed up to a wind force of 7 on the Beaufort scale (wind speed 14m/sec)  
**Outrigger position : 7,95 x 5,72 m**  
 Operation allowed up to a wind force of 7 on the beaufort scale (wind speed 14 m/sec)


**Lifting chart**

**Outrigger spread : 7,95 m x 7,66 m**

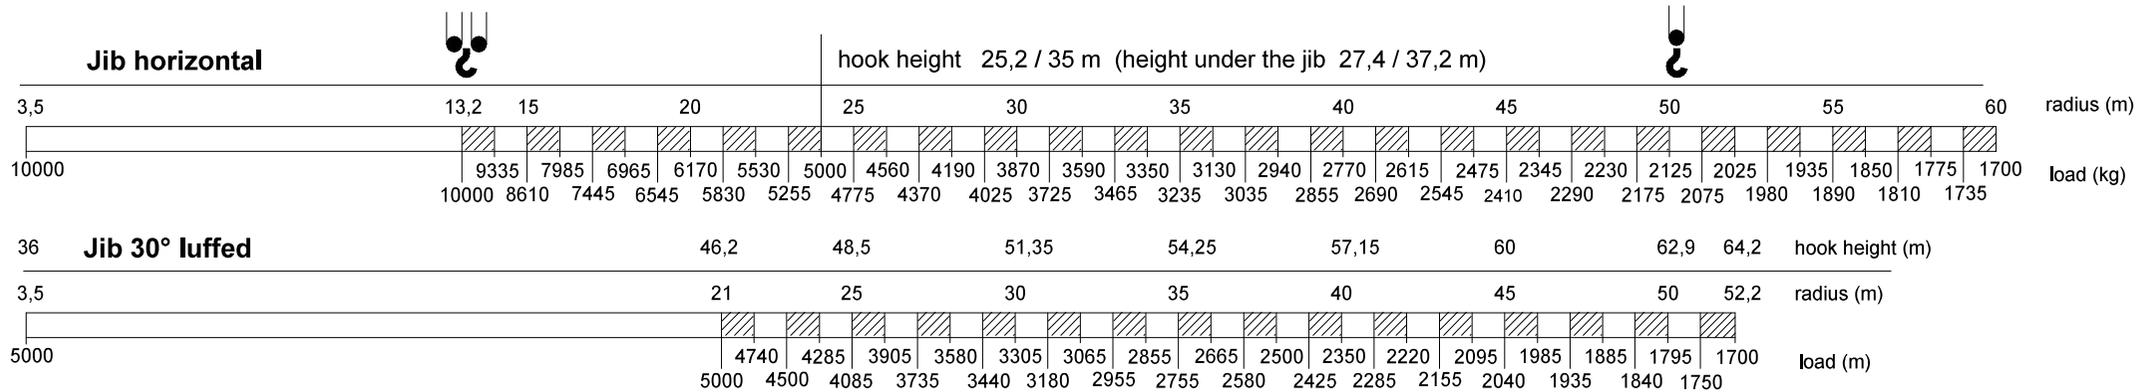

**Lifting chart**

**Outrigger spread : 7,95 m x 5,72 m**

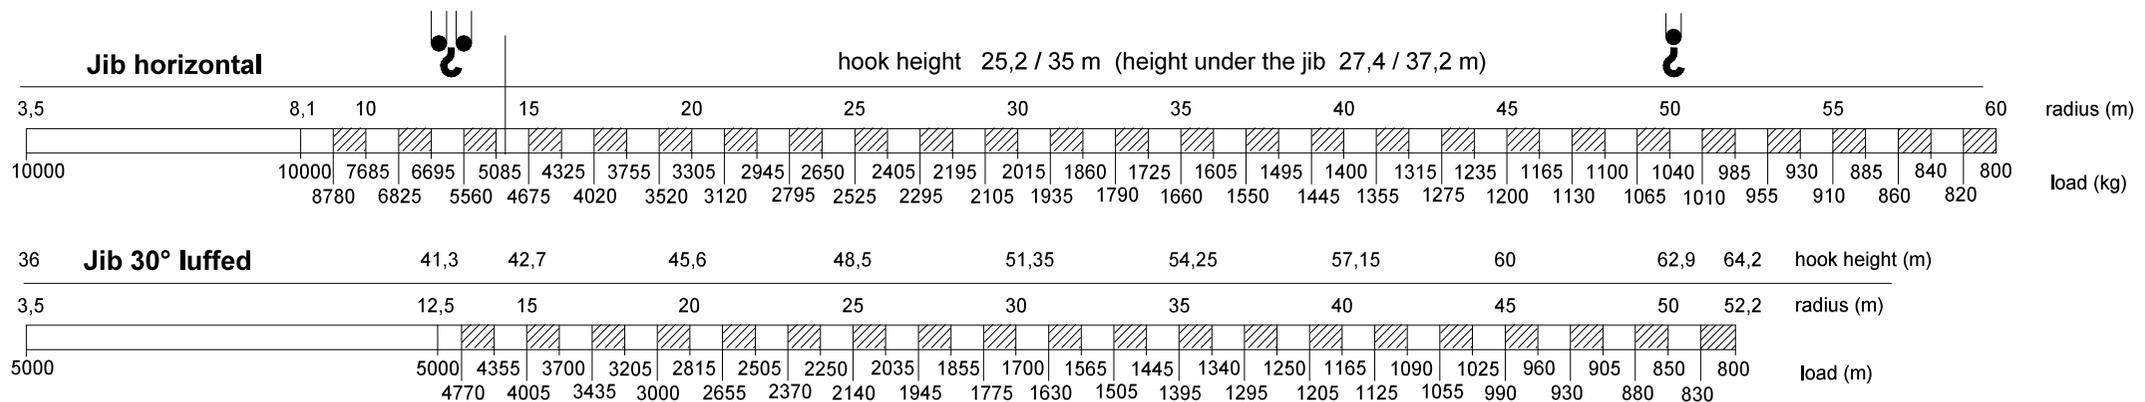


# SPIERINGS HYDRAULIC FOLDING CRANE SK1265-AT6

## Hoisting Specifications

Jib radius 60 m

## Outrigger support base

7,95 m x 7,66 m

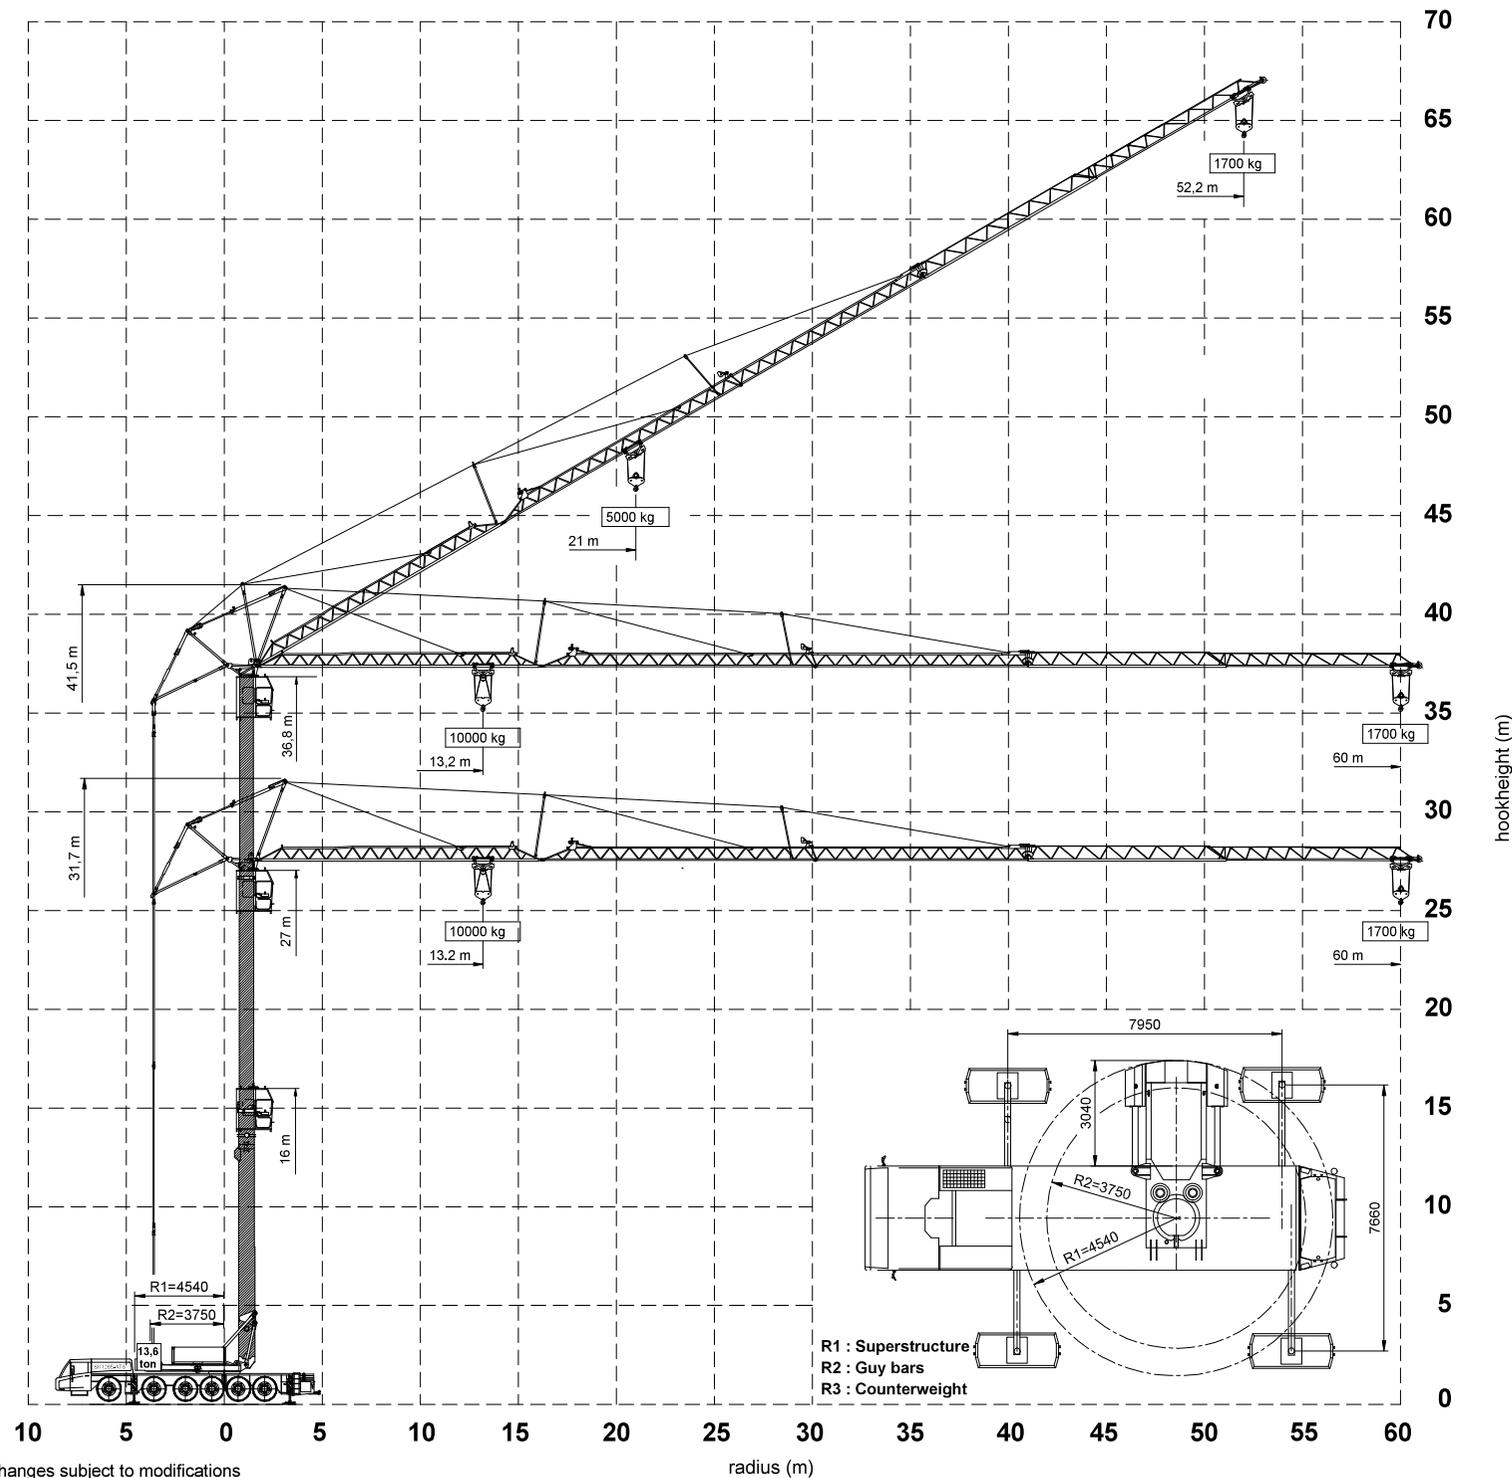

Changes subject to modifications

R1 : Superstructure  
R2 : Guy bars  
R3 : Counterweight

**SPIERINGS**  
MOBILE CRANES

Merwedestraat 15  
5347 KZ Oss NL  
Tel. +31 (0)412-626964  
Fax +31 (0)412-645299  
www.spieringscranes.com

121-00126104